S-Sight

This series simplifies surveillance with high-quality images and enhanced night vision capabilities. Powered by AI (DDA™ Video Analytics) and equipped with Check Point protection for comprehensive monitoring. Choose from rainbow cameras, Motorized Varifocal options, and Anti-Vandal designs for high-security areas.

PROVISION ISR
PROTECTING YOUR PRIVACY

DM-340WIPSN-28

4MP WiFi Fixed Lens Dome Camera with IR LED and DDA1 Analytics

Equipped with a 2.8mm fixed lens, this 4MP small Dome WIFI camera is designed for short-distance surveillance (up to 10m) in indoor scenarios. The camera offers outstanding DDA Analytics (Detect, Distinguish, Alert), which can perform human and vehicle recognition. With various detection rules and triggers. This model complies with NDAA demands and ensures your device is cyber-protected round the clock with the integrated Check Point Quantum IoT Nano agent that provides an advanced threat prevention layer against the common attack vectors at runtime. With its excellent performance, reliability, and affordable price, the DM-340WIPSN-28 camera is the perfect solution for any basic installation.

S-SIGHT IP

CHECK POINT EMBEDDED

4 MP



Wi-Fi | 10m IR – IR View 0 Lux | WDR – True | Audio IN | Built In Mic

DDA1 ANALYTICS | Infra Red | FACE DETECTION | NDAA | FIXED LENS | ONVIF MTSG

MAIN FEATURES

- DM-340WIPSN-28 4MP WiFi Fixed Lens Dome Camera with IR LED and DDA1 Analytics
- Sensor: 1/2.7" CMOS
- Resolution: 2560×1440 25/30FPS (4MP)
- Lens: 2.8mm (110°)
- True Day&Night – ICR
- Illumination: 10m (2 High-Power IR LEDs)
- Compression: H.265+/ H.264+ / H.265 / H.264 / MJPEG
- Quantum IoT Nano agent by Check Point™
- General Analytics: Camera Tampering, Item Monitoring
- Human & Vehicle Recogition: Sterile Area, Line Crossing, Area Entry, Area Exit
- True WDR (120dB), BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 256GB)
- Built-in Microphone + Audio input
- ONVIF: Profile M/T/S/G
- Weight: ~280g
- Power: DC12V/~300mA

DM-340WIPSN-28

SPECIFICATIONS

3rd Party Cyber Protection	
General	Quantum IoT Nano agent by Check Point™
Protection Methods	Shell injection protection, File Monitor, Import-Table Protection, Dynamic-Memory Protection

NDAA Compliant	
NDAA Compliant	Yes

Video	
Image Sensor	1/2.7" CMOS
Effective Pixels	2560x1440
Electronic Shutter	1/3s ~ 1/100000s
Day & Night	ICR
Min. Illumination	0.007 lux @F1.6, AGC ON; 0 lux with IR

Audio	
Audio compression	G.711A/G.711U
Communication	One-Way Audio

Image	
Image Settings	AWB, Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	True WDR (120dB), BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	Mirror/Flip, Corridor Mode
Privacy Zone	Yes

Events and Analytics	
Analytics	General Analytics: Camera Tampering, Item Monitoring Human & Vehicle Recogition: Sterile Area, Line Crossing, Area Entry, Area Exit
Motion Detection	Yes

Compression

DM-340WIPSN-28

Resolution	4MP (2560x1440) / 3MP (2304x1296) / 2MP (1920x1080) / 1MP (1280x720) / D1 / QVGA /CIF
Frame Rate	1-25/30FPS
Video Compression	H.265+/ H.264+ / H.265 / H.264 / MJPEG**
Multi-Stream	Master Stream: 4MP (2560x1440) / 3MP (2304x1296)/2MP (1920x1080) (1~30fps) Substream: 1MP (1280x720) / D1 (704x576) / VGA/ 640x360/ CIF (352x288) Third Stream: D1 (704x576) / VGA/ 640x360/QVGA (480x240) / CIF (352x288) (1~30fps)
Bit Rate	64Kbps ~ 8Mbps@H.265 / 64Kbps ~ 8Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR

Lens	
Lens (Field of View)	2.8mm (110°)
Iris	Fixed Iris
Lens Mount	M12 Mount
Detect	55m(180ft)
Recognize	11m(39ft)
Identify	5.5m(18ft)

Network	
User Access	Supports simultaneous monitoring of up to 6 users with multi-stream real-time transmission
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, SNMP, 802.1X, RTSP, RTMP, Multicast, UPnP, Email, FTP, HTTPS, QoS, P2P, HTTP POST, Auto Report, WiFi
Remote Monitoring	IE Browsing (Plug-In required), Chrome/Edge/Safari/Firefox plug-in free browsing, Ossia VMS Software, Provision Cam2 Mobile App *P2P WEB connetion always requires Plugin
Ethernet	100Mbps
ONVIF	Profile M/T/S/G

Connectivity	
Network	RJ45 & WiFi
Audio Connectivity	Built-in Microphone + Audio input


DM-340WIPSN-28


Alarm	No
SD Card	Event/Schedule based Main/Substream recording (Up to 256GB)
Wiegand	N/A
Power	DC Socket
Analog Video Output	No

Housing	
PoE	No
Illumination	10m (2 High-Power IR LEDs)
Power Supply	DC12V/~300mA
Protection Rate	N/A
Work Environment	-30°C~60°C, 10%~90% Humidity
Bracket	3-Axis Bracket
Dimensions	Ø109.4mm ×62mm
Weight (gross)	~280g
Hard Reset Button	Yes

DM-340WIPSN-28

DIMENSIONS

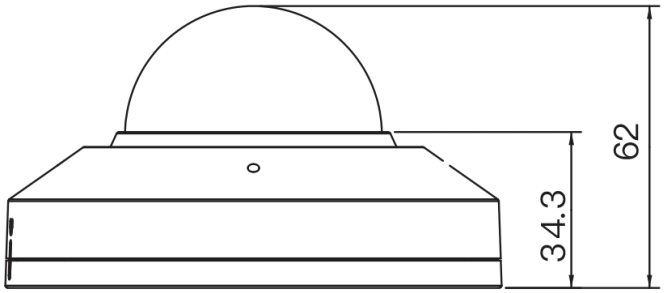

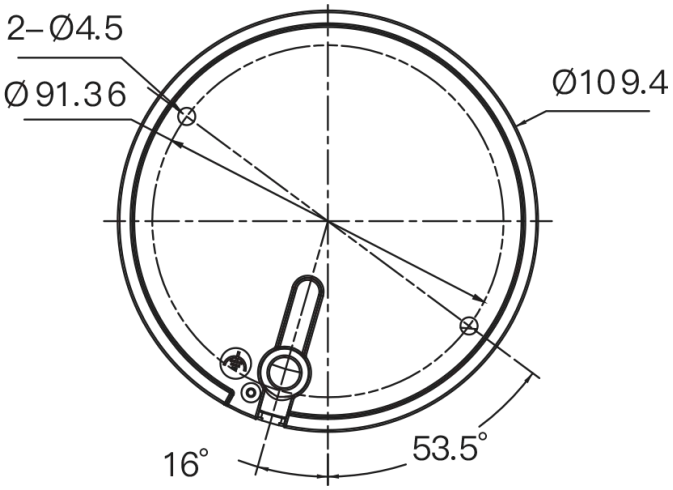

ACCESSORIES

