BSV-320AR-36

2MP Fixed Lens Small Bullet Camera And White LED

The rainbow camera series is equipped with super light-sensitive sensors that allow the camera to provide a color image throughout the day. When the ambient light is insufficient, the camera will turn on the integral lighting, allowing it to continue providing a full-color image. Featuring 4in1 technology, the camera is ideal for Plug & Play over existing analog infrastructure. With its outstanding performance, reliability, and affordable price, the BSV-320AR-36 camera is the perfect solution for basic installations.

2 MP



BLC | HLC | Control over coax | 2D-DNR | Build-In Mic

White LED | WDR True | 3.6 mm Lens | IP67 Protection rating | 20m IR IR View 0 Lux

4 IN 1 | BUILT-IN MICROPHONE | FIXED LENS | rainbow COLOR NIGHT VISION

MAIN FEATURES

- BSV-320AR-36 2MP Fixed Lens Small Bullet Camera And White LED
- Sensor: 1/2.8" 5MP CMOS Sensor
- Selectable Output: 2MP: 1920×1080 AHD/TVI/CVI CVBS: 700TVL
- Lens: 3.6mm Mega-Pixel Fixed (85°)
- 24/7 Full-Color Day Mode
- 2D-DNR
- Digital WDR/HLC/BLC
- Illumination: 20m (2 High-Power White LED)
- IP67
- Weight: ~480g
- Power: DC12V/300mA

BSV-320AR-36

PROVISION ISR
PROTECTING YOUR PRIVACY

SPECIFICATIONS

Video	
Image Sensor	1/2.8" 5MP CMOS Sensor
Image Format	16:9
Effective Pixels	1920 x 1080
Scanning System	Progressive
Min. Illumination	0 lux with LED
Day & Night	24/7 Full-Color Day Mode
Day & Night Modes	24/7 Full-Color Day Mode only

Compression	
Resolution	2MP: 1920x1080 AHD/TVI/CVI CVBS: 700TVL
Frame Rate	25/30FPS

Image	
Backlight Compensation	BLC/HLC
S/N Ratio	≥52dB (AGC off)
Privacy Zone	no
Noise Reduction	2D-DNR
Image Enhancement	Digital WDR, BLC, HLC

On Screen Data	
CoC Support	Yes
OSD Menu	Available via CoC only

Lens	
Field of View	3.6mm Mega-Pixel Fixed (85°)
Iris	Fixed Iris
Lens Mount	M12 Mount


BSV-320AR-36

Connectivity	
Video Output	2MP AHD/TVI/CVI/CVBS + PAL/NTSC
Audio Connectivity	Built-in Microphone

Housing	
Illumination	20m (2 High-Power White LED)
Bracket	3-Axis Bracket
Protection Rate	IP67
Dimensions	172.2*73.4*74.5mm
Weight (gross)	~480g
Power	DC12V/300mA
Work Environment	-30°C ~ 50°C，10% ~ 90% humidity

BSV-320AR-36


DIMENSIONS

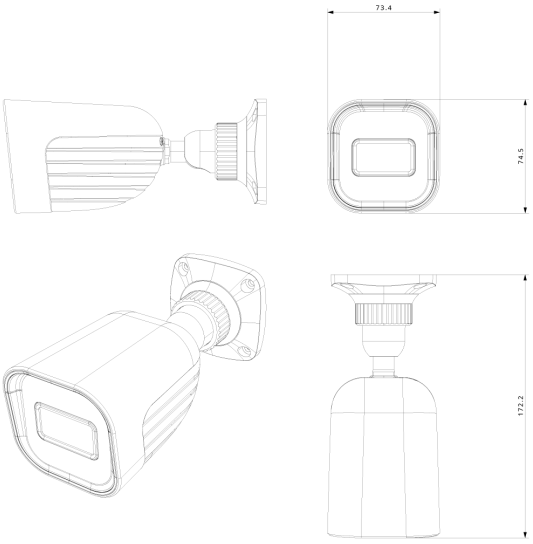

ACCESSORIES




BSH / I2

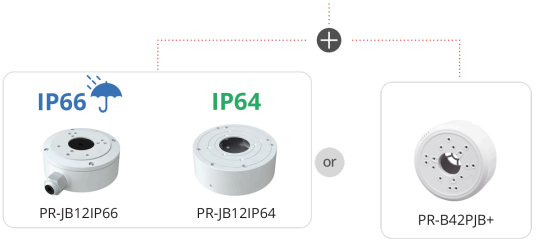

PR-JB12IP66 PR-JB12IP64

PR-B42PJB+

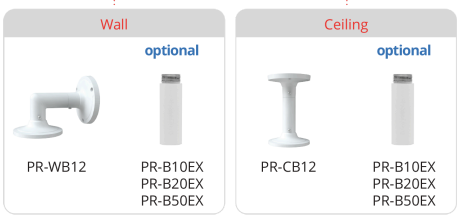

PR-WB12 PR-B10EX PR-B20EX PR-B50EX

PR-CB12 PR-B10EX PR-B20EX PR-B50EX