

NVS8

If you want 24/7 video recording or if you have multiple IP cameras to manage, NVS8 is your best choice. NVS8 features PoE (Power over Ethernet), with a single network cable connecting each of your IP cameras to the NVR for both power supply and video signal transmission. Easy wiring - the wiring process cannot be simpler for DIY enthusiasts.

1. Specs

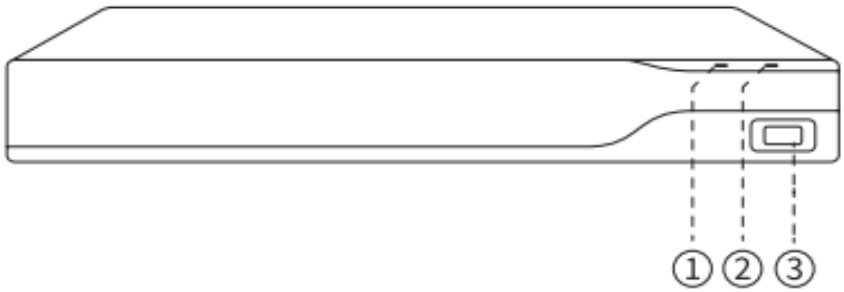

1	Power LED
2	HDD LED
3	USB Port

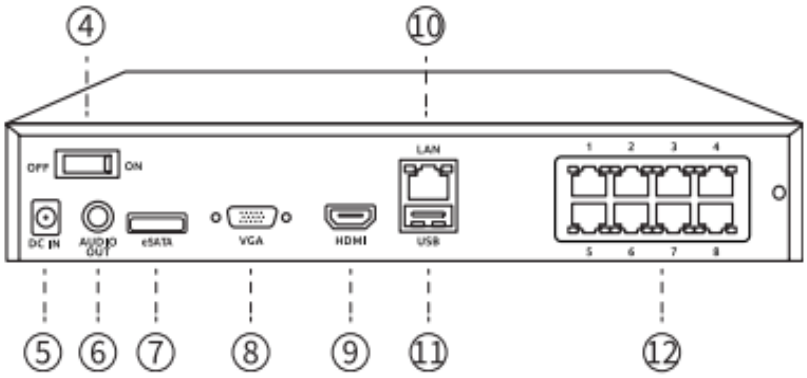

4	Power Switch
5	Power Input

6	Audio Out
7	eSATA Port
8	VGA Port
9	HDMI Port
10	LAN Port
11	USB Port
12	PoE Ports

2. Setup and Install

Set up the System

What's in the Box

Note: The package content may vary and update with different version and platforms, please take the below information only for a reference. And the actual package content are subject to the latest information on the product selling page.
NVS8



NVS8*1



NVR Power Adapter*1



HDMI Cable*1



USB Mouse*1



1m Network Cable*1




Quick Start Guide*1


Connect and Power the NVR

Before initially set up the system on the App, please connect the cameras to the NVR and power on the NVR.


1. Connect the NVR's LAN port to router by Ethernet cable, and connect the mouse to the USB port of the NVR.

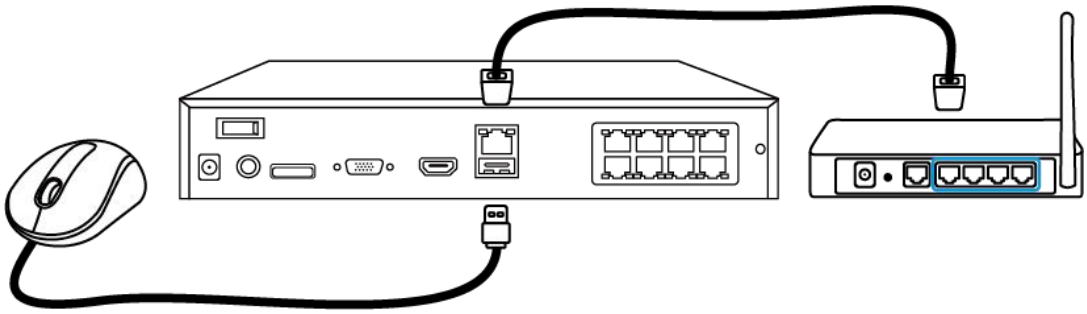


2. Connect the PoE camera to PoE port of the NVR. Or if you want to use a WiFi camera, please connect the camera to the WiFi of the same router as NVR.

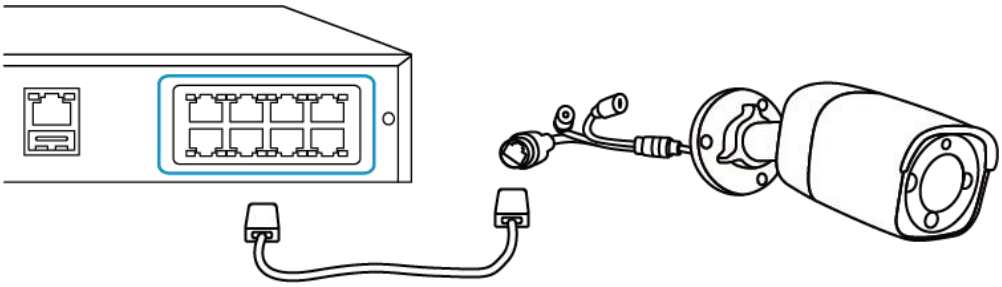

3. Connect the power adapter to the NVR, and switch on the NVR.

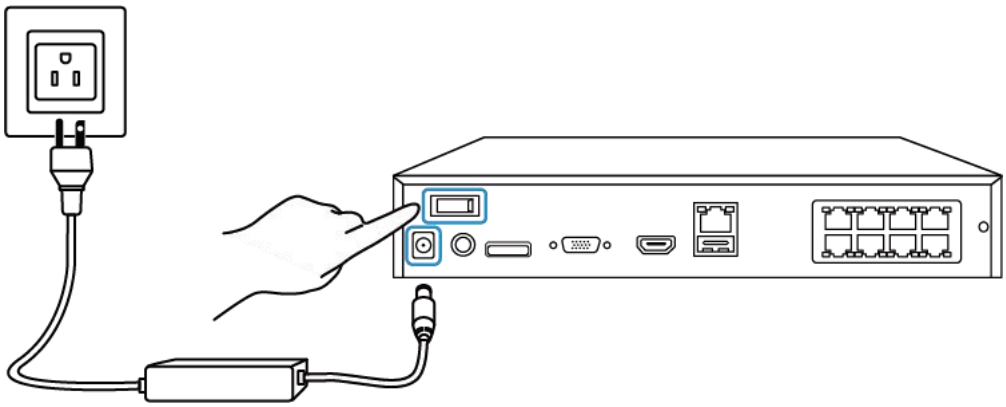


4. Connect the NVR to a monitor via HDMI/VGA to set it up. As a alternative, you can follow the next part to set up the system on the App.

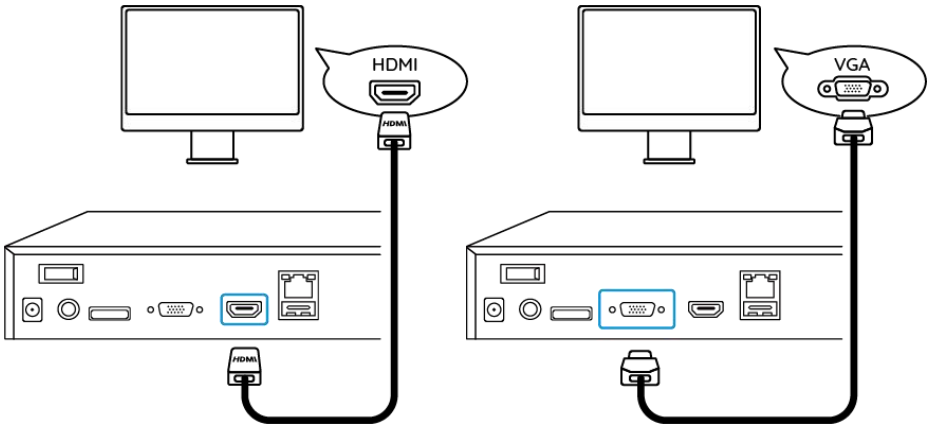

Set up the system on the App


Please initially set up the system on the App by referring to the following steps.
Note: Please make sure the device and your phone are on the same network.

Step 1. Tap the icon on the top right corner.

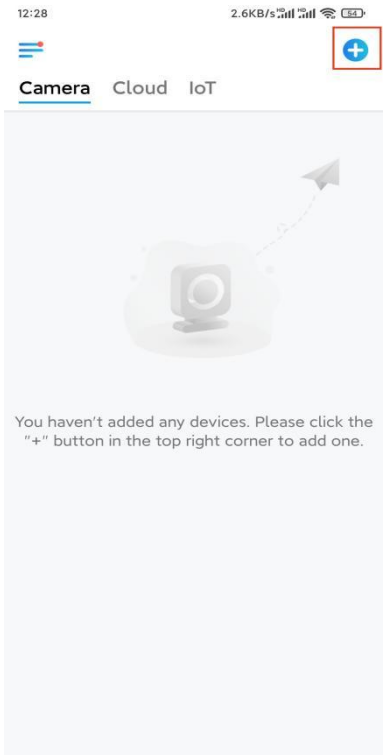


Step 2. Scan the QR code on your NVR, or tap **Input UID/IP** to enter the UID of the NVR (a 16-digit number under the QR code). Then tap **Next**.




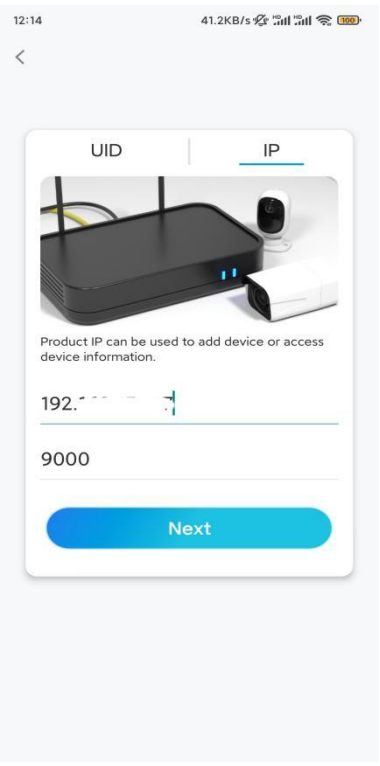

Step 3. For security considerations, you need to create a password for the first time.

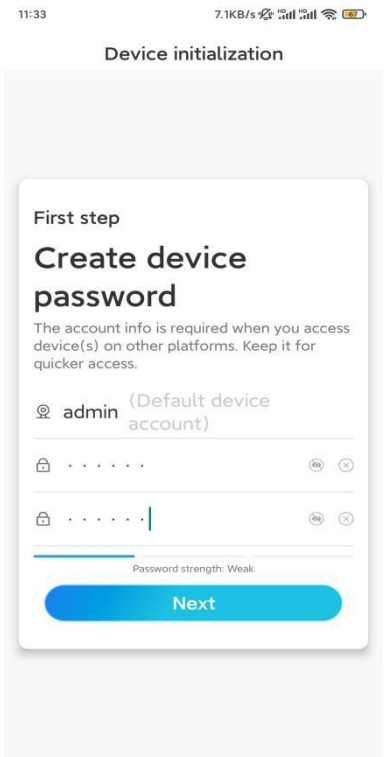

Step 4. Name your device. Then tap **Next**.

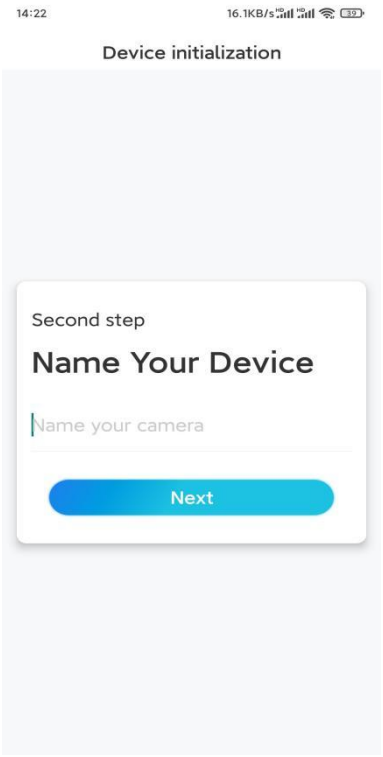

Step 5. Initialization finished! You can start to live view now.

