P437

P437 leads a world of 4K enhanced security and don't miss out on any detail th at may matter. With 4 times the resolution of 1080p HD cameras, every image and video is brought to life with next-level clarity. 5X optical zoom ensures that nothing escapes your watchful eye, even it's at a distance. No more compromising on image quality when you need to focus on a hard-to-see detail.

1. Specs



1	Built-in Mic
2	Screw Hole
3	Vandal-Proof Housing

4	IR LEDs
5	Lens
6	Spotlight
7	Speaker



1	microSD Card Slot
2	Reset Button

2. Setup and Install

Set up the Camera

What's in the Box

Note: The package content may vary and update with different version and platforms, please take the below information only for a reference. And the actual

package content are subject to the latest information on the product selling page.

P437



P437*1



1m Network Cable*1



Quick Start Guide*1



Surveillance Sticker*1



Mounting Template *1



Pack of Screws*1

Waterproof Lid *1



Reset Needle *1


Set up the Camera on the App

Before initial setup, follow the steps below to connect your camera.

1. Connect the camera to a LAN port on your router with an Ethernet cable.


2. Use the power adapter to power on the camera.

NOTE: You can power the camera with a PoE switch, PoE injector, Reolink PoE NVR or a DC 12V power adapter (not included in the package).

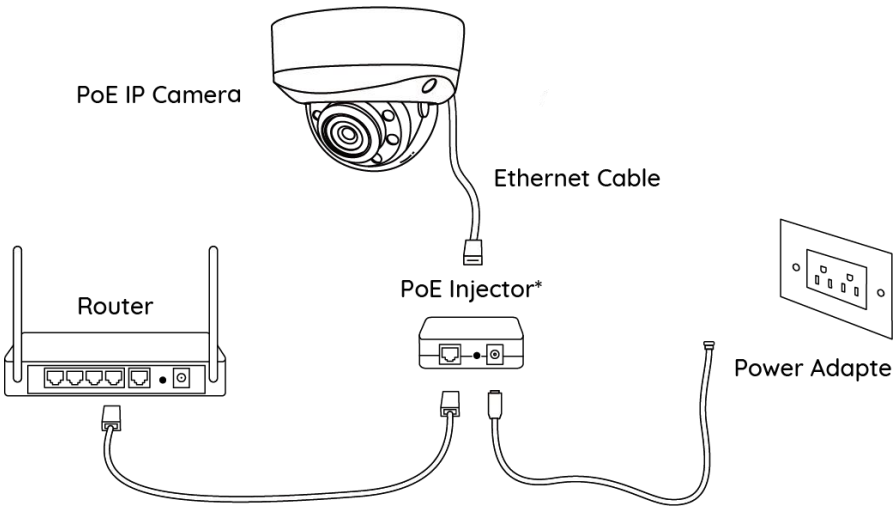

Here is a guide on how to initially set up the camera via Reolink App.


Step 1. Tap the icon ⊕ in the top right corner.

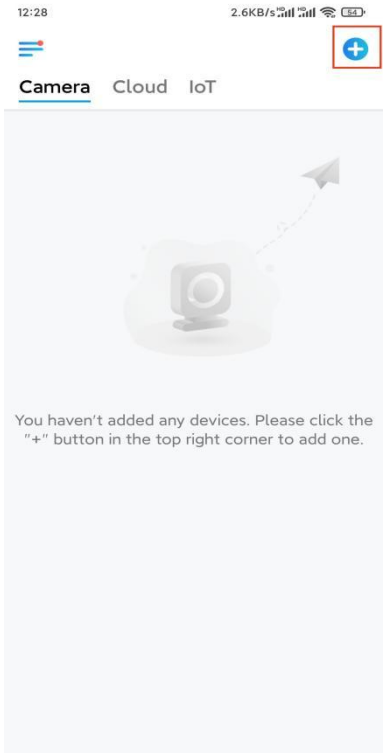


Note: If you've enabled the **Add Device Automatically** option on the App's Settings page, you can tap this device on the **Devices** page and turn to **Step 3** directly.


Step 2. Scan the QR code on the back of the camera. You may tap **Light** to enable a flashlight when setting up the camera in a dark environment.

If the phone doesn't respond, please tap **Input UID/IP** and then manually type in the UID (16-digit characters under the QR code of the camera). Then tap **Next**.

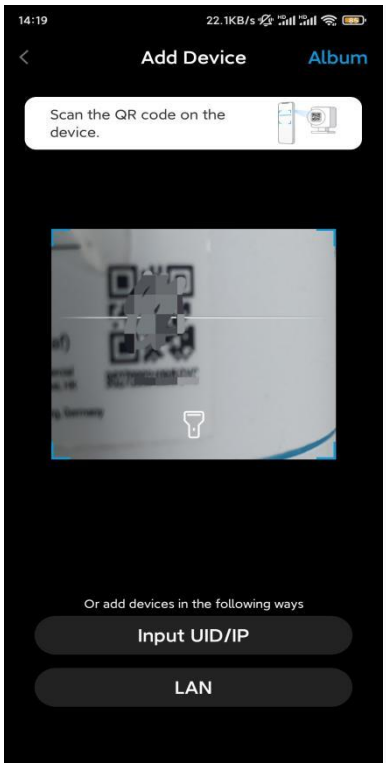


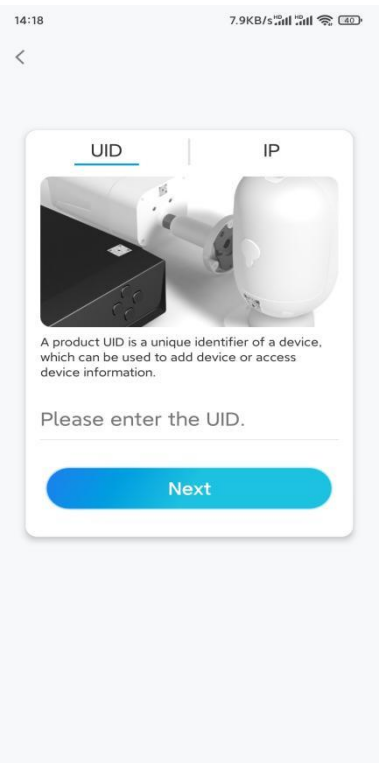


Step 3. Create a login password for your camera. Then tap **Next**.

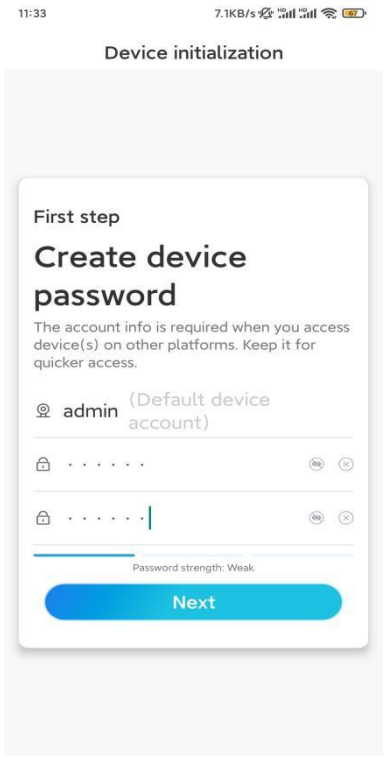

Step 4. Name your camera. Then tap **Next**.

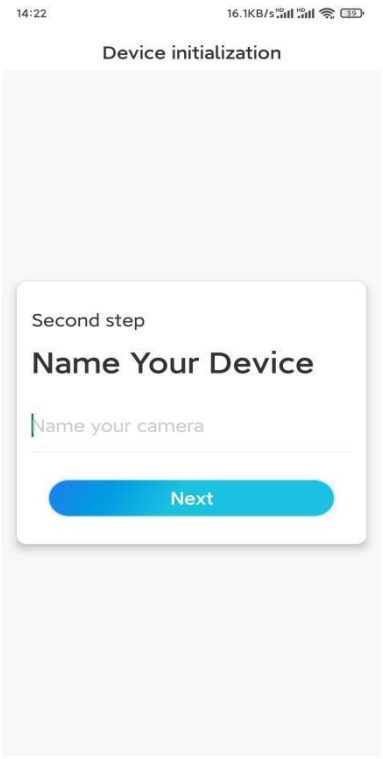


Step 5. Initialization finished! You can start live viewing now.

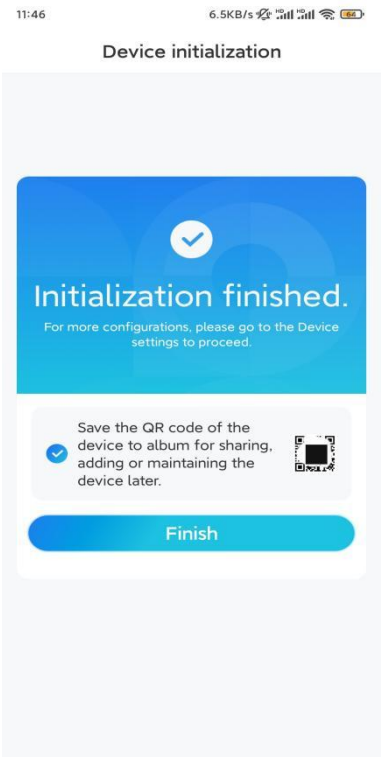


Install the Camera

Please follow the steps below to install the camera.


Step 1. Put the mounting template on the ceiling and drill holes at the indicated locations, then insert the drywall anchors.

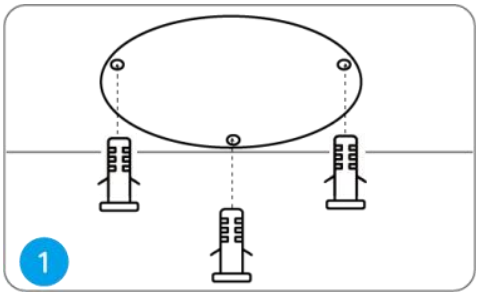


Step 2. Screw the dome cover off the camera base with the Allen key.

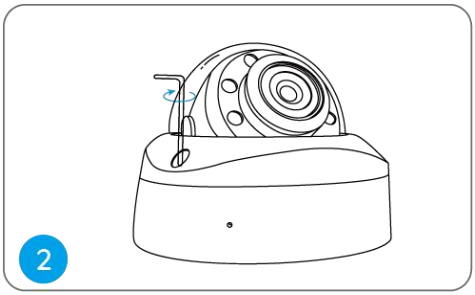


Step 3. Screw the camera base to the ceiling.

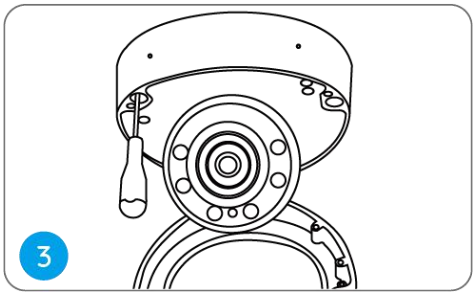

Step 4. Adjust the camera's viewing angle as needed.

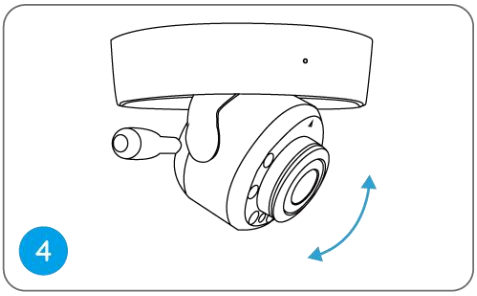

Step 5. Attach the dome cover to the camera base by tightening the screws.

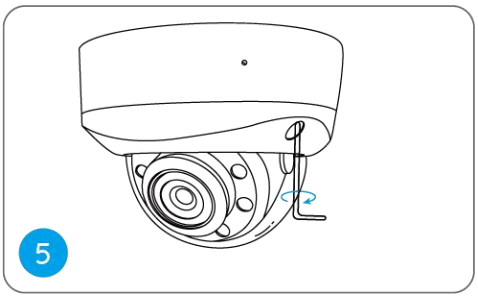

Done! You've successfully mounted the camera.